


AAN456532

How to identify a pin with our article code

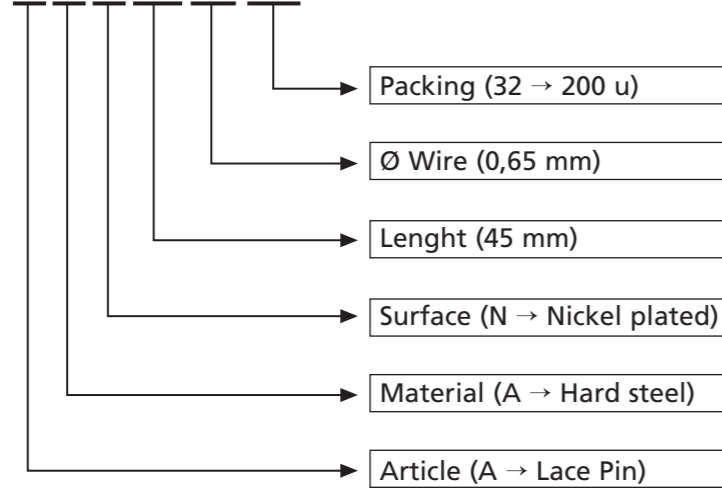

BRASS LACE PINS RUSTPROOF

CODE	Lenght mm	Shaft wire diameter	Head size mm	Finish	Packing		BENDING RESISTANCE Folch scale
					Code 25 (400) Code 32 (200)	Code 03	
ALD1055	10	0,55 mm	1,45 ±0,1	gold	400 u	100 g	0 ██████████ 100
ALD1855	18	0,55 mm	1,45 ±0,1	gold	400 u	100 g	0 ██████████ 100
ALD1865	18	0,65 mm	1,55 ±0,1	gold	400 u	100 g	0 ██████████ 100
ALD2665	26	0,65 mm	1,55 ±0,1	gold	400 u	100 g	0 ██████████ 100
ALN2665	26	0,65 mm	1,55 ±0,1	nickel	400 u	100 g	0 ██████████ 100
ALN3080	30	0,80 mm	1,80 ±0,1	nickel	200 u	100 g	0 ██████████ 100
ALN4210	42	1,00 mm	2,00 ±0,1	nickel	200 u	100 g	0 ██████████ 100

HARD STEEL PINS RUST RESISTANCE

CODE	Lenght mm	Shaft wire diameter	Head size mm	Finish	Packing		BENDING RESISTANCE Folch scale
					Code 25 (400) Code 32 (200)	Code 03	
AAN1745	17	0,45 mm	1,20 ±0,1	nickel	400 u	100 g	0 ██████████ 100
AAN3050	30	0,50 mm	1,40 ±0,1	nickel	400 u	100 g	0 ██████████ 100
AAN3060	30	0,60 mm	1,50 ±0,1	nickel	400 u	100 g	0 ██████████ 100
AAN3460	34	0,60 mm	1,50 ±0,1	nickel	400 u	100 g	0 ██████████ 100
AAN3765	37	0,65 mm	1,55 ±0,1	nickel	200 u	100 g	0 ██████████ 100
AAN4360	43	0,60 mm	1,50 ±0,1	nickel	200 u	100 g	0 ██████████ 100
AAN4565	45	0,65 mm	1,55 ±0,1	nickel	200 u	100 g	0 ██████████ 100

GLASS AND PLASTIC HEADED PINS RUSTPROOF

CODE	Lenght mm	Shaft wire diameter	Head	Head size mm	Finish	Packing		BENDING RESISTANCE Folch scale
						Code 29 (100) Code 05 (20)	Code 03	
ACV3060	30	0,60 mm	vidrio	3	nickel	100 u	75 g	0 ██████████ 100
ACV3870	38	0,70 mm	vidrio	3,7	nickel	100 u	75 g	0 ██████████ 100
ACV4978	49	0,78 mm	vidrio	4,2	nickel	100 u	75 g	0 ██████████ 100
AAV4865	48	0,65 mm	plástico	4	nickel	100 u	75 g	0 ██████████ 100
AIC3259	32	0,59 mm	plástico	4	polished	100 u	75 g	0 ██████████ 100
APS6480	64	0,80 mm	perla	6,3	nickel	20 u	75 g	0 ██████████ 100
ASL6480	64	0,80 mm	perla	6,3	nickel	20 u	75 g	0 ██████████ 100

STAINLESS STEEL DIPPED PINS RUSTPROOF - INOXIDABLE

CODE	Lenght mm	Shaft wire diameter	Head	Head size mm	Finish	Envase		BENDING RESISTANCE Folch scale
						Code 29 (100) Code 05 (20)	Code 03	
AIP2659	26	0,59 mm	dipped	1,60 ±0,1	silver	400 u	100 g	0 ██████████ 100
AIP2654	26	0,54 mm	dipped	1,50 ±0,1	silver	400 u	100 g	0 ██████████ 100
APS2659	26	0,59 mm	dipped	1,60 ±0,1	assorted	400 u	100 g	0 ██████████ 100
APS3059	30	0,59 mm	dipped	1,60 ±0,1	assorted	200 u	100 g	0 ██████████ 100
APS3452	34	0,52 mm	dipped	1,40 ±0,1	assorted	200 u	100 g	0 ██████████ 100

STAINLESS STEEL PINS RUSTPROOF - INOXIDABLE

CODE	Lenght mm	Shaft wire diameter	Head size mm	Code 25 (400)	Packing Code 03	BENDING RESISTANCE Folch scale
AIN2259	22	0,59 mm	1,50 ±0,1	400 u	100 g	0 ██████████ 100
AIN2640	26	0,40 mm	1,00 ±0,1	400 u	100 g	0 ██████████ 100
AIN2653	26	0,53 mm	1,40 ±0,1	400 u	100 g	0 ██████████ 100
AIN2659	26	0,59 mm	1,50 ±0,1	400 u	100 g	0 ██████████ 100
AIN3059	30	0,59 mm	1,50 ±0,1	400 u	100 g	0 ██████████ 100
AIN3249	32	0,49 mm	1,20 ±0,1	400 u	100 g	0 ██████████ 100
AIN3452	34	0,52 mm	1,40 ±0,1	400 u	100 g	0 ██████████ 100
AIN3840	38	0,40 mm	1,00 ±0,1	400 u	100 g	0 ██████████ 100
AIN3859	38	0,59 mm	1,50 ±0,1	400 u	100 g	0 ██████████ 100

